


Cleanfill 2" AdBlue® Overfill Prevention Device

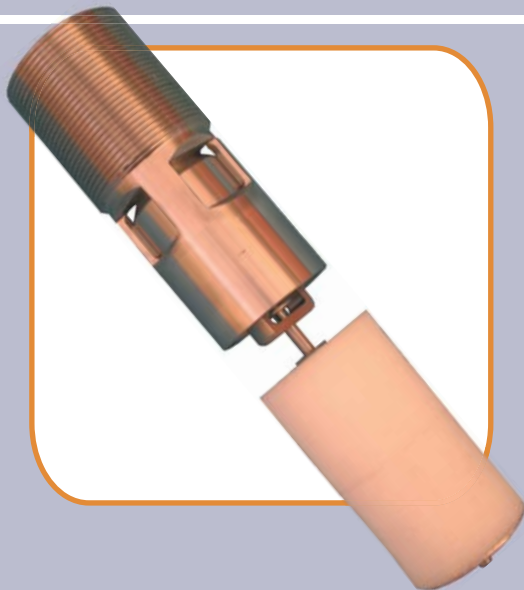

Fitted to the tank, the Cleanfill 2" AdBlue® Overfill Prevention Device is a piece of safety and environmental protection equipment intended for use on AdBlue® storage tanks

The Cleanfill 2" AdBlue® was designed and developed for an exclusive AdBlue® application (clearances, design, body and gaskets materials...)

The Cleanfill 2" AdBlue® system is LAFON patented

Station Accessories

Technical Specifications

- Operating temperature range : - 10°C ; + 35°C
- Stainless steel body
- High density polyethylen float
- Maximum flow rate : 40 m³/hr - 650 litres/minute
Minimum flow rate : 2.4 m³/hr - 40 litres/minute
- Maximum pressure : 7 bar - 43.50 psi
- Minimum pressure : 150 mbar - 2.17 psi
- Re-opening time : less than one minute
- Fits to threaded BSP female sleeve-nut 2"
- Compact shape
- Suitable for direct or offset filling systems

Advantages

- Very reliable and long working life
- Operational test on every unit
- Automatic operation
- Easily fitted (without removing buffer)
- Requires minimal space (optimises useful tank volume)
- Pressure or gravity filling

Vapor recovery

Pipe work

Filling limiters


Valves air-vents & accessories

Gauges

Dispensers DAC & systems

Reference	Description
10070000	Cleanfill 2" AdBlue®

Location on the tank



Lafon - 44 avenue L. Victor Meunier - 33530 Bassens - France
Tel. +33 (0) 557 80 80 80 - Fax +33 (0) 556 31 61 21 - www.lafon.fr

